

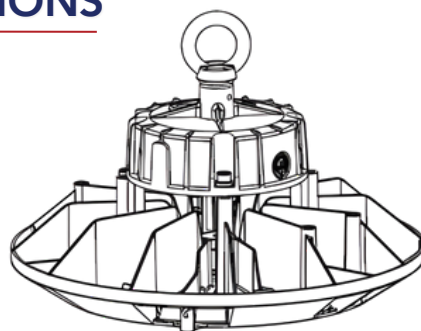
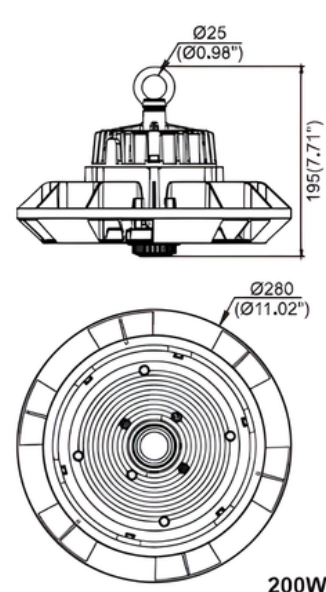


INSTALLATION INSTRUCTIONS

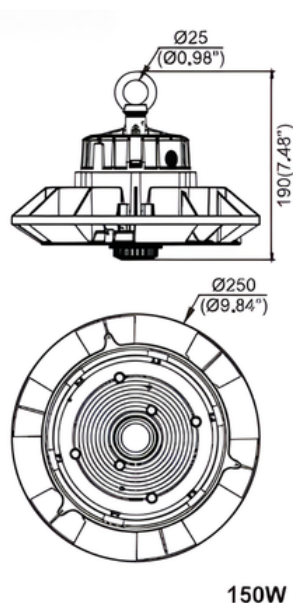


PHYSICAL DIMENSIONS Unit: mm/inch

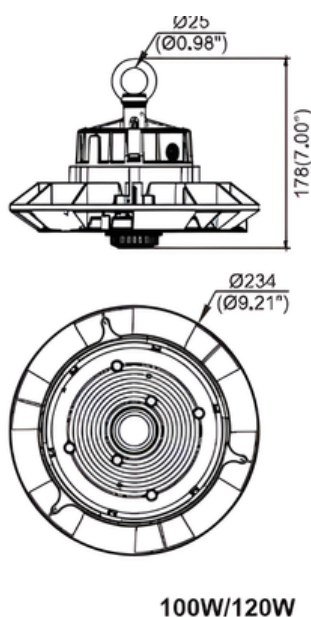


PRODUCT SPECIFICATIONS	100W/120W	150W	200W
INPUT VOLTAGE	100-277VAC / 120-277VAC / 100-240VAC / 220-240VAC (Subject to the input voltage on nameplate)		
POWER FREQUENCY	50 / 60 Hz		
OUTLOOK DIMENSIONS	Ø234x178mm (Ø9.21" x 7.00")	Ø250x190mm (Ø9.84" x 7.48")	Ø280x195mm (Ø11.02" x 7.71")
LUMINAIRE NET WEIGHT	1.5±0.3kg (3.31±0.66LBS)	1.7±0.3kg (3.75±0.66LBS)	2.2±0.3kg (4.85±0.66LBS)
WORKING TEMPERATURE	-30°C to +50°C (-22°F to +122°F)		
STORING TEMPERATURE	-40°C to +70°C (-40°F to +158°F)		

MOTION SENSOR MOUNT

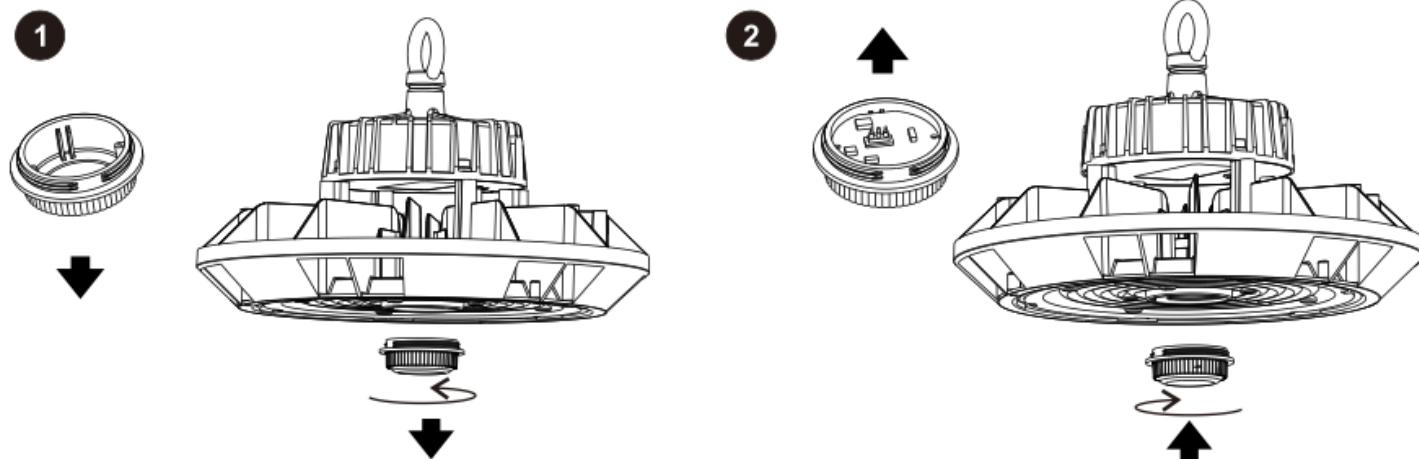


SUSPENSION MOUNT

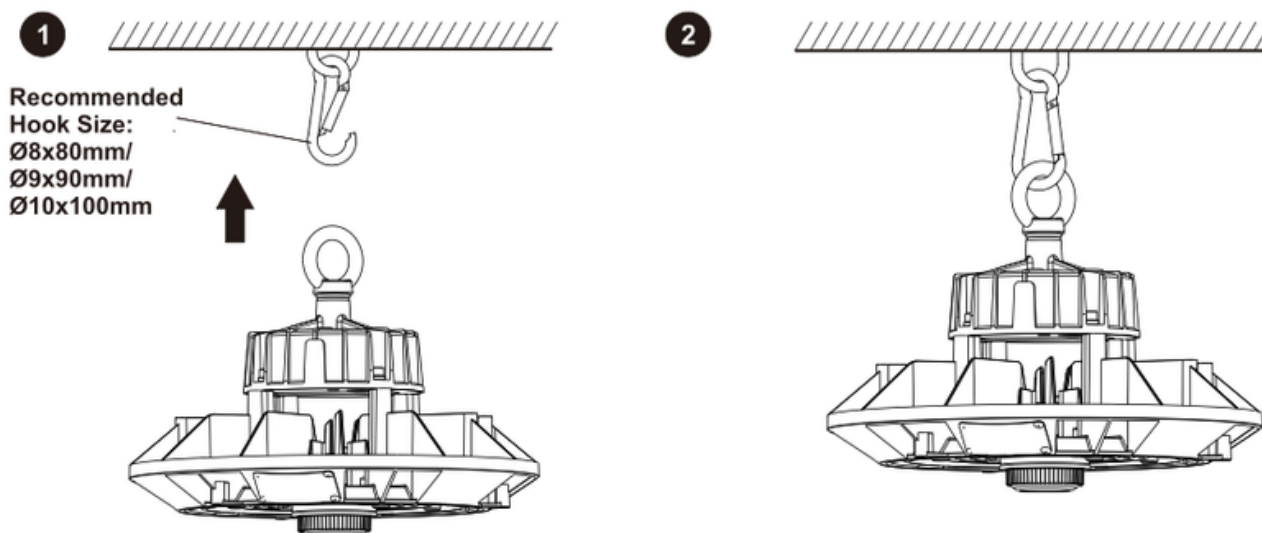


CEILING BRACKET MOUNT

Unit: mm/inch

100W/120W/150W

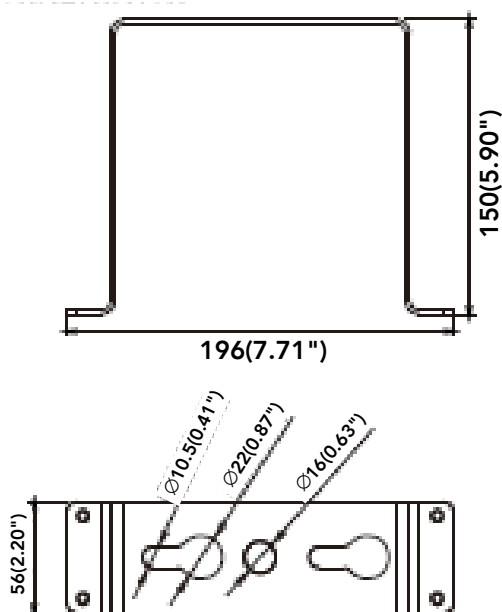


200W

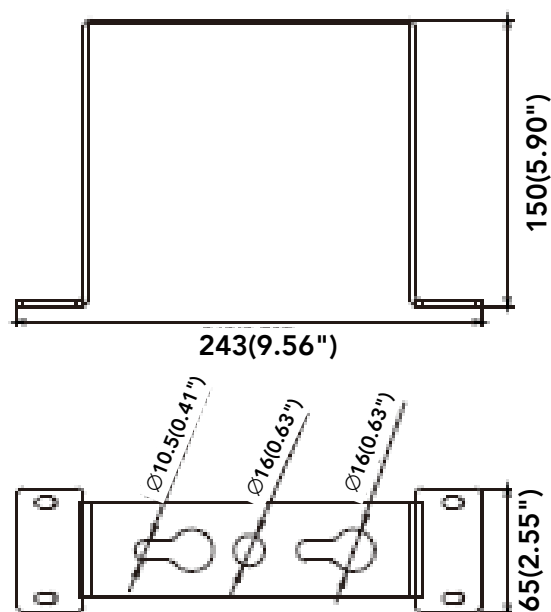


CEILING BRACKET MOUNT


1. 

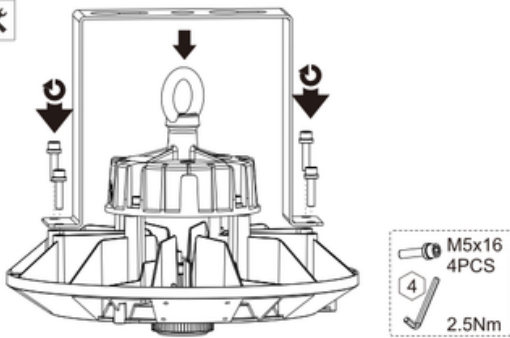


2. 

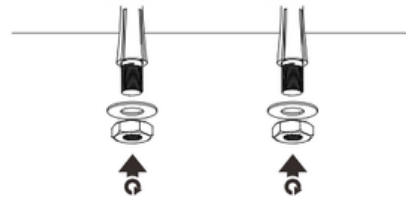


3. 

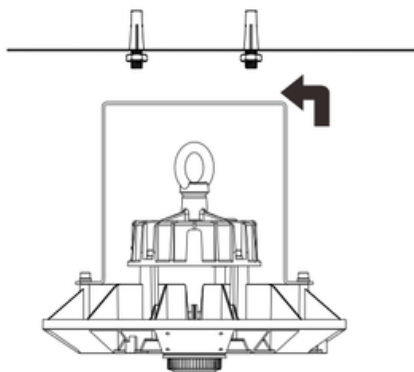


4. 



DIFFUSER MOUNT PC Diffuser (Unit:mm/inch)

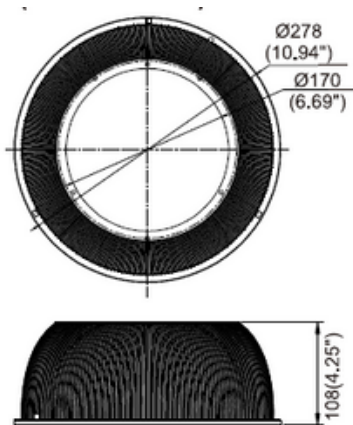


1. 

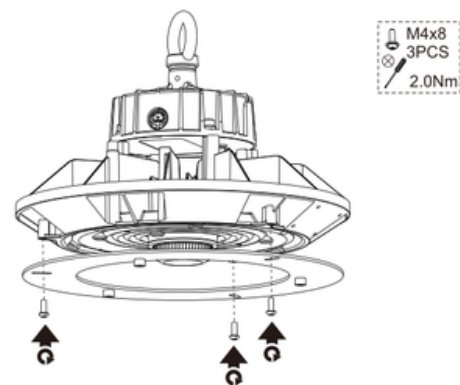

Fix the adaptor with 3 supplied screws


2. 

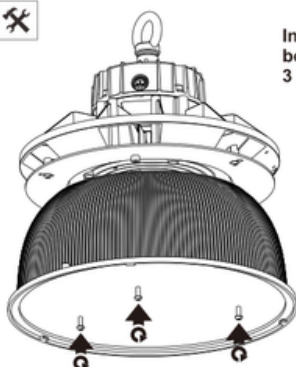


Install the Anti-glare diffuser body to LED high bay with 3 supplied screws.




3. 

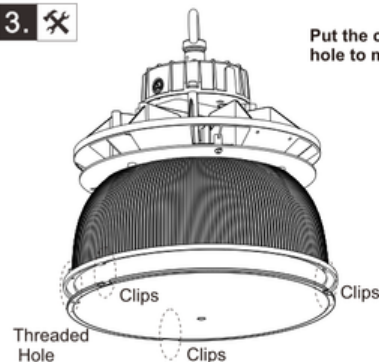



Put the clips and threaded hole to matching positions.

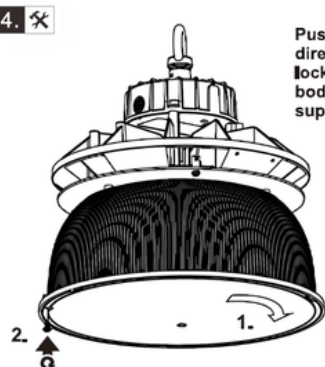

 M3x8
1PC
0.8Nm

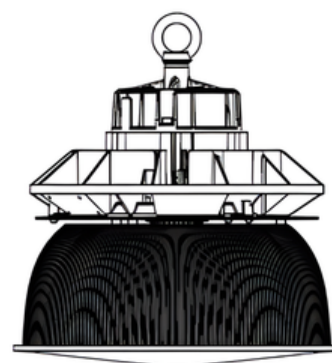

(Unit: mm/inch)

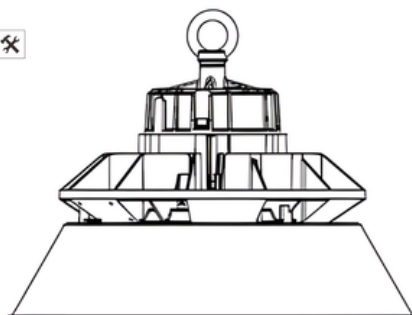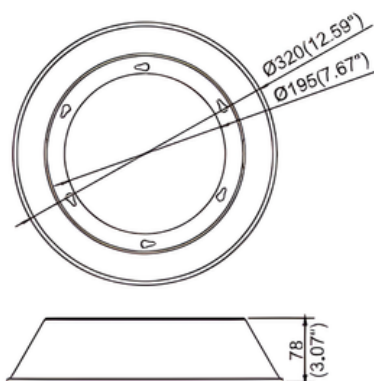

Dimmable

	DIM+/DA1	purple	or	purple	or	blue	or	brown	or	black	or	red
	DIM-/DA2	gray		pink		white		blue		gray		orange

	DIM+/DA1	purple	or	purple	or	purple	or	purple
	DIM-/DA2	gray		pink		gray		pink
	Aux 12Vdc +	pink		black/white		black/white		red

	DIM+/DA1	purple	or	purple	or	purple
	DIM-/DA2	gray		pink		pink
	Aux 12Vdc +	pink		black/white		black/white
	Aux 12Vdc -	black/white		blue/white		orange

	L	brown	or	black	or	black
	N	blue		white		white
	⊕GND	yellow/green		green		green
	DIM+/DA1	black		red		brown
	DIM-/DA2	gray		orange		blue



Warning! Do not wire dim cord to high voltage, or dim function will fail.

- Don't wire dim cord to high voltage, avoid dim function fall.
- Installation height recommends to be above 4 meters and indoor application.
- We highly suggest users to maintain and clean dust from the luminaire regularly, to keep its lifespan.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

CONTACT THE HAZBRITE TEAM FOR MORE ENQUIRIES.

HAZBRITE

www.hazbrite.com
sales@hazbrite.com
+85238533890

Unit 2A, 17/F, Glenealy Tower,
No. 1 Glenealy, Central.
Hong Kong.



Disclaimer

The information provided is accurate to the best of Hazbrite's knowledge at the time of publication. However, customers and end-users should consult the latest product specifications, installation guides, terms, and warranties available at www.hazbrite.com, which shall take precedence in case of any discrepancies or conflicts.