

# HazBrite™

## HRS

Explosion-proof LED Flood Light/High-bay Lighting for Hazardous Environments

Efficient lighting solutions designed for rugged and demanding spaces

13,600 TO 32,000 LUMENS



## ABOUT US

- Trusted provider of robust LED lighting engineered for the most challenging industrial settings
- Supporting clients across industries like oil & gas, mining, manufacturing, and marine sectors.
- Committed to excellence, reliability, and adherence to the highest safety standards.

---

## WHY CHOOSE HAZBRITE

### ⇒ SAFETY YOU CAN COUNT ON :

- Thoroughly tested by experts to meet stringent safety requirements.
- Compliant with industry-leading certifications and protocols.
- Built to deliver long-lasting performance in demanding condition.

### ⇒ FAST AND RELIABLE DELIVERY OF PRODUCTS :

- Majority of orders fulfilled on time delivery.
- Immediate availability of products for urgent needs.
- Real-time tracking for complete visibility and control.

### ⇒ EXPERTISE DRIVEN SERVICES :

- Dedicated support team with deep industry knowledge.
- Customized lighting solutions tailored to your project's need.
- Comprehensive after-sales support and maintenance.

### ⇒ ECO - CONSCIOUS SOLUTIONS ;

- High-efficiency lighting that cuts energy usage.
- Environmentally responsible design and packaging.
- Sustainable products that reduce waste and operational costs.

---


**SETTING THE STANDARD IN SAFETY-ORIENTED  
LIGHTING FOR CRITICAL, HAZARDOUS & SAFE  
OPERATIONS ALIKE.**

## RATINGS AND CERTIFICATIONS

NEC/CEC STANDARD  
UL 844 Hazardous Locations

- Class I Division 2, Groups A, B, C, D
- Class II Division 1, Groups E, F, G
- Class II Division 2, Groups F, G
- Class III
- Class I, Zone 2, Group IIC

CSA C22.2 No.  
CSA C22.2 No.  
UL 1598 Wet Locations  
UL 1598A Marine Outside Type (Salt Water)  
UL 8750 LED Safety  
ABS  
FCC  
IP66/67  
IK09  
5G  
NEMA 4X

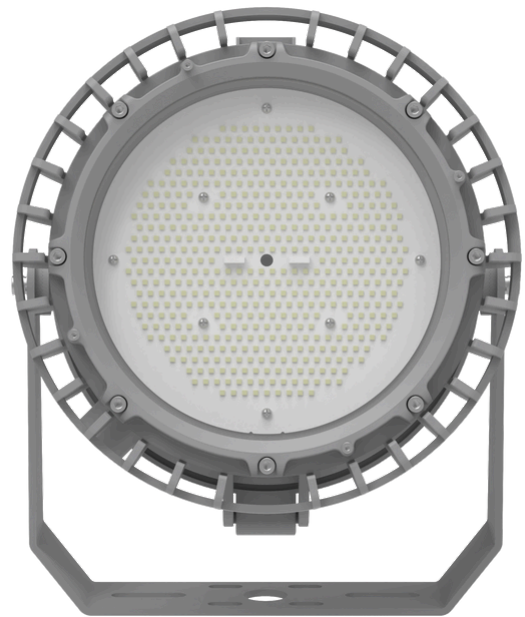

5-year product warranty


Lumen Maintenance: L70 > 150,000 hours @ 25°C



## STANDARD MATERIALS

- Lamp housing, Splice box, and adapter – die cast copper-free aluminum
- Finish – baked Powder epoxy/polyester
- Lens – heat, shock and impact resistant glasses or pc lens
- Gaskets – high temperature resistant silicone
- Hardware – stainless steel
- Lacquer-free nameplate

*Note : Product Specifications and Design subject to change without notice*

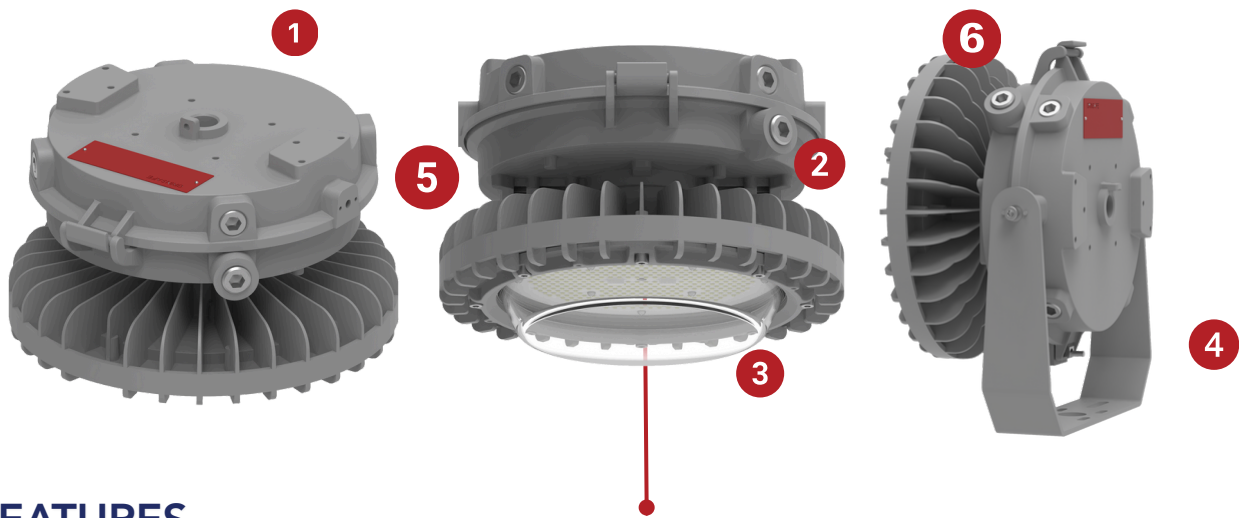

## KEY FEATURES

1. Easy installation. Single barrel nut and hinge design, one-hand operation for quick and easy installation
2. LOW PROFILE. 196mm in height with maximum 34,000 lumen output fits perfectly for mounting in confined areas.
3. High efficacy. Lumens efficacy up to 170Lm/W, reducing energy costs by up to 75% over conventional lamps.
4. Retrofit friendly. Universal mounting accessories minimizes the SKUs and maximizes the flexibility.
5. Build to last. Copper-free aluminum housing and impact resistant lens sealed from the outside environment provides ingress protection against water and dust.
6. Expandability. Sensor can be attached on the light to realize the intelligent application.

## ADDITIONAL FEATURES

- Universal Voltage: AC120-277, 347-480V (50/60Hz)
- Optional self-testing emergency battery backup
- High efficacy up to 170lm/W
- 3 different optics: T1 / T3 / 110°
- CCT Adjustable (3000K/ 4000K /5000K)
- Wildlife Friendly Amber color options
- 10kV surge protector is standard, 20kV is optional
- Dimming: Standard 1 – 10VDC
- Ambient temperatures -40°C to +65°C
- IP67 / IK09 / 5G / NEMA 4X
- Resistant up to 2,000 PSI of hose directed water
- Tested 1000hrs salt spray to standard ASTM“B117-11”
- Lumen Maintenance L70>150,000hours @ 25°C
- 5-year limited system warranty




## APPLICATIONS



Chemical



Oil and Gas

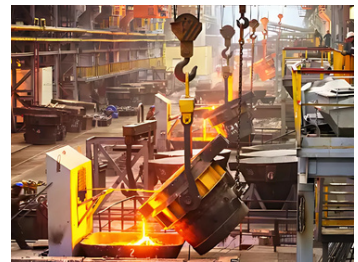

Foundries



Pulp & Paper



Power Generation



Waste & Sewage  
Treatment



Land Rigs



Offshore Rigs



Manufacturing

## TECHNICAL DATA

### ELECTRICAL DATA

|                          |                          |
|--------------------------|--------------------------|
| Rated Power              | 80W / 100W / 150W / 200W |
| Input Voltage            | 100-277, 347-480V/AC     |
| Input Frequency          | 50/60Hz                  |
| Power Factor             | > 0.95                   |
| Driver Efficiency        | ≥ 90%                    |
| DC output Ripple & Noise | < 200mVP-P               |

### OPTICAL DATA

|                                     |                               |
|-------------------------------------|-------------------------------|
| Lumen Output                        | 13,600 lumens = 32000 lumens  |
| Luminous Efficacy (Lumens per Watt) | 170 lumens/W                  |
| Beam Angle                          | 110° / T1 / T3                |
| Correlated Color Temperature (CCT)  | Amber 2700K 3000K 4000K 5000K |
| CRI                                 | Ra>70                         |

### ENVIRONMENTAL DATA

|                               |   |
|-------------------------------|---|
| Ambient Operating Temperature | -40°C~+65°C (80W 100W 150W )<br>-40°C~+60°C (200W ) |
| Ambient Operating Humidity    | 10%~90% RH  |
| Atmospheric Pressure          | 86~106KPa   |

### TECHNICAL DATA

|                  |  |
|------------------|--|
| Lens Material    | Glass / PC / Drop Lens                                   |
| Mounting Options | Pendant / Ceiling / Wall Mount / Stanchion/<br>U-bracket |
| Cable Entries    | 3/4" NPT, 1" NPT, 1-1/4" NPT, 1-1/2" NPT                 |
| Net Weight       | 7.7kg ( 16.98 lbs )                                      |

## ORDERING INFORMATION

# HRS 26-U-2-110 - NW- TG - PD1- GR - XX

### MODEL

- HRS

### POWER

- 14 = 13,600 Lumens / 80W
- 17 = 17,000 Lumens / 100W
- 26 = 25,500 Lumens / 150W
- 34 = 32,000 Lumens / 200W

### VOLTAGE

- U = 100-277V 50/60HZ
- N = 347-480V 60HZ

### EX-LEVEL

- 2 = C1D2, C2D1
- 0 = Non Hazardous

### OPTICS

- 110 = 110° Beam Angle
- T1 = Type I
- T3 = Type III

### COLOR TEMP

- SW = 3000K (Soft white)
- NW = 4000K (Neutral white)
- CW = 5000K (Cool white)

### LENS

- TG = Clear glass
- FG = Frosted glass
- DFG = Frosted glass drop lens
- TPL = Clear polycarbonate<sup>1</sup>
- FPL = Frosted polycarbonate<sup>1</sup>

### COLOR

- GR - Gray

### ACCESSORIES

- WGR1 = Wire guard for flat glass
- WGR2 = Wire guard for drop lens
- SC1 = Safety cable
- VRL25 = Dark sky bolt-on visor 25°
- VRL90 = Dark sky bolt-on visor 90°
- PBC48 = Pipe Clamp (M8\*48mm) for pole Ø 1-7/8" (48mm)
- PBC60 = Pipe Clamp (M8\*60mm) for pole Ø 2-3/8" (60mm)
- CAB = 3' SEOWW-18/3 Cord
- CGL = Cable Gland 3/4" NPT
- PS = Pole Stanchion 2-3/8" (60mm)


### MOUNT STYLE

- PD1 = Pendant mount (3/4" NPT)
- PD2 = Pendant mount (1" NPT)
- TB3 = Trunnion bracket (3/4" NPT)
- W90 = Wall mount 90°
- W25 = Wall mount 25°
- S90A = Stanchion-90° (1-1/4" NPT)
- S90B = Stanchion-90° (1-1/2" NPT)
- S25A = Stanchion-25° (1-1/4" NPT)
- S25B = Stanchion-25° (1-1/2" NPT)
- FLM = Flush ceiling mount


<sup>1</sup>Only available for C1D2 areas  
Note : Surge Protector is already included.

## BEAM DISTRIBUTION DATA


110°

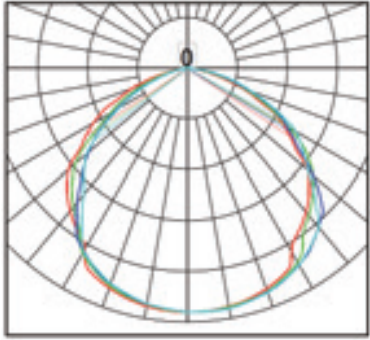

Type I

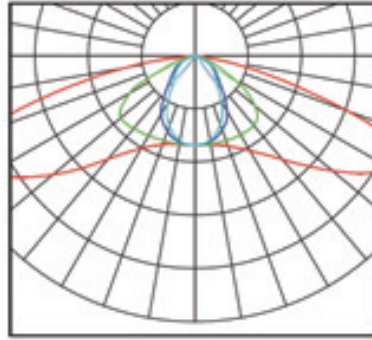


Type II

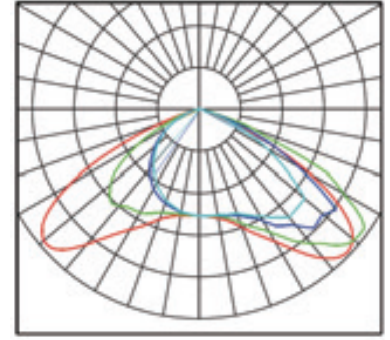

## DIMENSIONS

UNIT: MM(IN)

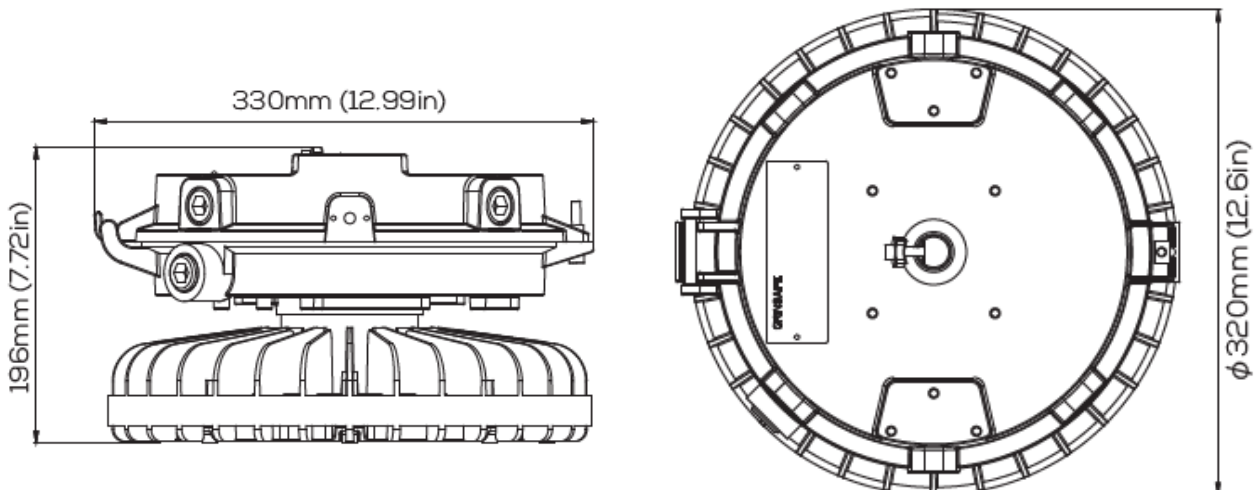

# LIGHTING BASICS FOR HAZARDOUS LOCATIONS

## CLASSIFICATION OF DIVISIONS AND ZONES

| Hazard Level                     | Division Scheme | Zone Scheme      | Definitions  |
|----------------------------------|-----------------|------------------|--|
| Continuous Hazard                | Division 1      | Zone 0 / Zone 20 | A place in which an explosive atmosphere is continually present  |
| Intermittent Hazard              |                 | Zone 1 / Zone 21 | A place in which an explosive atmosphere is likely to occur in normal operation                                      |
| Hazard Under Abnormal Conditions | Division 2      | Zone 2 / Zone 22 | A place in which an explosive atmosphere is not likely to occur in normal operation, but may occur for short periods |

## IP CODES

| Solid Objects                 | Liquids  |
|-------------------------------|--|
| 0 - No protection             | 0 - No Special protection                                  |
| 1 - Objects > 50mm diameter   | 1 - Vertically dripping Water                              |
| 2 - Objects > 12.5mm diameter | 2 - Vertically dripping water when enclosure tilted by 15° |
| 3 - Objects > 2.5mm diameter  | 3 - Sprayed water up to 60°                                |
| 4 - Objects > 1.0mm diameter  | 4 - Sprayed water from all directions                      |
| 5 - Dust protected            | 5 - Water Jets   |
| 6 - Dust Tight                | 6 - Powerful water jets                                    |
|                               | 7 - Temporary submersion to a depth of 1m                  |
|                               | 8 - Extended submersion to a depth of >1m                  |

## LIGHTING BASICS FOR HAZARDOUS LOCATIONS

### HAZARDOUS ATMOSPHERE CATEGORY

| Explosive Atmosphere       | Typical Hazard Material  | Hazard Class | Division Group                           | NEC 505 / CEC 18                   |
|----------------------------|--|--------------|--|------------------------------------|
| Gases, vapors, and liquids | A: Acetylene<br>B: Hydrogen, etc.<br>C: Ether, etc.<br>D: Hydrocarbons, fuels, solvents, etc.  | Class I      | Group A<br>Group B<br>Group C<br>Group D | IIC<br>IIC or IIB+H2<br>IIB<br>IIA |
| Dusts                      | E: Metal dusts (conductive and explosive)<br>F: Carbon dusts (some are conductive, and all are explosive)<br>G: Flour, starch, grain, combustible plastic or chemical dust (explosive) | Class II     | Group E<br>Group F<br>Group G            | IIIC<br>IIIC<br>IIIB               |
| Fibers and flyings         | Textiles, wood-working, etc. (easily ignitable, but not likely to be explosive)  | Class III    | Not Applicable                           | IIIA                               |

### IK CODES

| IK CODE         | IK01 | IK02 | IK03 | IK04 | IK05 | IK06 | IK07 | IK08 | IK09 | IK10 | IK11 |
|-----------------|------|------|------|------|------|------|------|------|------|------|------|
| IMPACT ENERGY J | 0.14 | 0.2  | 0.35 | 0.5  | 0.7  | 1    | 2    | 5    | 10   | 20   | 50   |

## LIGHTING BASICS FOR HAZARDOUS LOCATIONS

### TEMPERATURE CLASSIFICATION

| MARKING | NEC 500 / CEC | NEC 505 / IEC GROUP II |
|---------|---------------|------------------------|
| 450°C   | T1            | T1                     |
| 300°C   | T2            | T2                     |
| 280°C   | T2A           |                        |
| 260°C   | T2B           |                        |
| 230°C   | T2C           |                        |
| 215°C   | T2D           |                        |
| 200°C   | T3            | T3                     |
| 180°C   | T3A           |                        |
| 165°C   | T3B           |                        |
| 160°C   | T3C           |                        |
| 135°C   | T4            | T4                     |
| 120°C   | T4A           |                        |
| 100°C   | T5            | T5                     |
| 85°C    | T6            | T6                     |

## LIGHTING BASICS FOR HAZARDOUS LOCATIONS

### ZONE CLASSIFICATION AND EQUIPMENT PROTECTION LEVEL (EPL)

| GAS ZONES  | DEFINITION   | ATEX CATEGORY | EPL | REQUIRED PROTECTION     |
|------------|--|---------------|-----|-------------------------|
| Methane    | Mines with methane and dust. Equipment remains energised in explosive atmosphere | M1            | Ma  | Two Faults              |
| Methane    | Mines with methane and dust. Equipment is de-energised in explosive atmosphere   | M2            | Mb  | Severe Normal Operation |
| Zone 0     | Explosive atmosphere present continuously or for long periods, frequently        | 1G            | Ga  | Two Faults              |
| Zone 1     | Explosive atmosphere is likely to occur under normal conditions, occasionally    | 2G            | Gb  | One Fault               |
| Zone 2     | Explosive atmosphere is unlikely to occur under normal conditions, short periods | 3G            | Gc  | Normal Operation        |
| DUST ZONES | DEFINITION   | ATEX CATEGORY | EPL | REQUIRED PROTECTION     |
| Zone 20    | Explosive atmosphere present continuously or for long periods, frequently        | 1D            | Da  | Two Faults              |
| Zone 21    | Explosive atmosphere is likely to occur under normal conditions, occasionally    | 2D            | Db  | One Fault               |
| Zone 22    | Explosive atmosphere is unlikely to occur under normal conditions, short periods | 3D            | Dc  | Normal Operation        |

CONTACT THE HAZBRITE TEAM FOR MORE ENQUIRIES.

**HAZBRITE**

www.hazbrite.com  
sales@hazbrite.com  
+85238533890

Unit 2A, 17/F, Glenealy Tower,  
No. 1 Glenealy, Central,  
Hong Kong.



## Disclaimer

The information provided is accurate to the best of Hazbrite's knowledge at the time of publication. However, customers and end-users should consult the latest product specifications, installation guides, terms, and warranties available at [www.hazbrite.com](http://www.hazbrite.com), which shall take precedence in case of any discrepancies or conflicts.