



COPPER TUBULAR CABLE LUG

Tubular Cable Lugs Two Holes



Efficient lighting solutions and
accessories designed as per space
requirements



+852 3853 3890

 www.hazbrite.com



ABOUT US

- Trusted provider of high-performance accessories engineered for the most demanding industrial environments.
 - Supporting clients across industries like oil & gas, mining, manufacturing, and marine sectors. Committed to excellence, reliability, and adherence to the highest safety standards.
-

WHY CHOOSE HAZBRITE

⇒ SAFETY YOU CAN COUNT ON :

- Thoroughly tested by experts to meet stringent safety requirements.
- Compliant with industry-leading certifications and protocols.
- Built to deliver long-lasting performance in demanding condition.

⇒ FAST AND RELIABLE DELIVERY OF PRODUCTS :

- Majority of orders fulfilled on time delivery.
- Immediate availability of products for urgent needs.
- Real-time tracking for complete visibility and control.

⇒ EXPERTISE DRIVEN SERVICES :

- Dedicated support team with deep industry knowledge.
- Customized lighting solutions tailored to your project's need.
- Comprehensive after-sales support and maintenance.

⇒ ECO - CONSCIOUS SOLUTIONS ;

- High-efficiency lighting that cuts energy usage.
 - Environmentally responsible design and packaging.
 - Sustainable products that reduce waste and operational costs.
-

**SETTING THE STANDARD IN SAFETY-ORIENTED
ACCESSORIES FOR CRITICAL, HAZARDOUS & SAFE
OPERATIONS ALIKE.**


DESCRIPTION

HBSR long palm double stud tubular terminal ends, which are also known as "Non-Rotating Terminals" are manufactured with ETP grade copper with purity 99.96% having conductivity Min. 97.6% IACS.

STANDARD MATERIALS

- The terminal is annealed to prevent cracking during crimping, and a chamfered mouth facilitates easy cable insertion.
- Item identification on cable lug
- The terminal is coated with tin to prevent oxidation and ensure optimal corrosion resistance.
- Two holes ensure non-rotation in equipment such as a transformer & Moving equipment where vibration is critical.
- The hole size is punched according to per requirement.
- Material - Copper BS 1977/IS 191 (PART-V)

DIMENSIONS

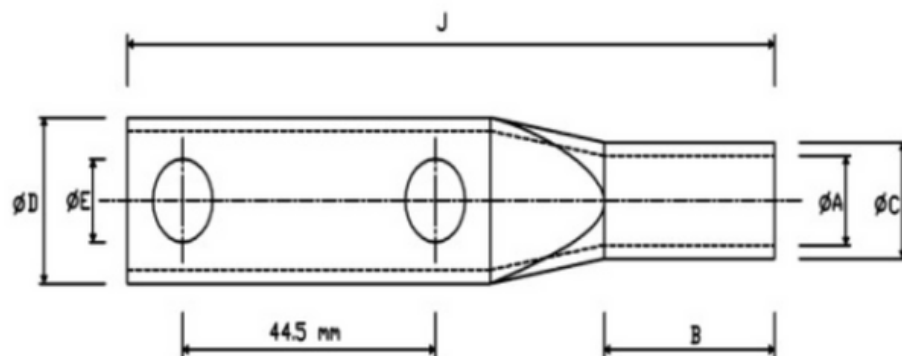

Note : Product Specifications and Design subject to change without notice



APPLICATIONS




Power Distribution



Renewable Energy



Automotive & Marine

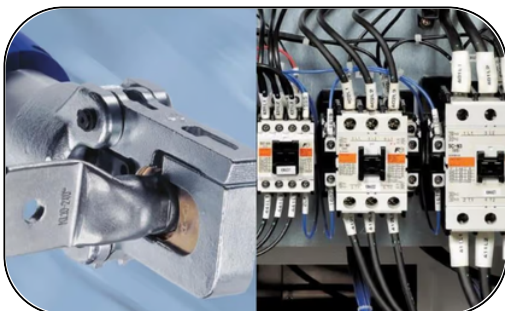

Industrial & Manufacturing



Railway & Transportation:

TECHNICAL DATA

Nominal Cross Section mm ²	PRODUCT NO.	Size of Bolt Die	A	C	D	I2	I
16	HBSR-16-10	10.5	5.4	7.6	14.5	16	100
25	HBSR-25-10	10.5	6.8	8.8	15	16	100
35	HBSR-35-10	10.5	8.2	10.6	16.5	16	100
50	HBSR-50-10	10.5	9.5	12.4	17	25	109
50	HBSR-50-13	13	9.5	12.4	17	25	109
70	HBSR-70-10	10.5	11.3	14.7	21	30	114
70	HBSR-70-13	13	11.3	14.7	21	30	114
95	HBSR-95-10	10.5	13.5	17.4	25	30	116
95	HBSR-95-13	13	13.5	17.4	25	30	116
120	HBSR-120-10	10.5	15	19.4	27.5	35	122
120	HBSR-120-13	13	15	19.4	27.5	35	122
150	HBSR-150-10	10.5	16.5	21.2	30	40	126
150	HBSR-150-13	13	16.5	21.2	30	40	126
185	HBSR-185-10	10.5	18.5	23.5	33.5	42	132
185	HBSR-185-13	13	18.5	23.5	33.5	42	132
240	HBSR-240-10	10.5	21	26.5	38.5	50	143
240	HBSR-240-13	13	21	26.5	38.5	50	143
300	HBSR-300-13	13.7	23.5	30	43	55	144
400	HBSR-400-13	13.7	28.5	36.5	52.5	60	149
500	HBSR-500-13	13.7	30	39	56	65	160
630	HBSR-630-13	13.7	35	45	58	75	160

CONTACT THE HAZBRITE TEAM FOR MORE ENQUIRIES.

HAZBRITE

www.hazbrite.com
sales@hazbrite.com
+85238533890

Unit 2A, 17/F, Glenealy Tower,
No. 1 Glenealy, Central.
Hong Kong.



Disclaimer

The information provided is accurate to the best of Hazbrite's knowledge at the time of publication. However, customers and end-users should consult the latest product specifications, installation guides, terms, and warranties available at www.hazbrite.com, which shall take precedence in case of any discrepancies or conflicts.