



COPPER TUBULAR CABLE LUGS



**Tubular Cable Lugs Two Holes
As per 12-SDMS-02**

Efficient lighting solutions and
accessories designed as per space
requirements



+852 3853 3890

www.hazbrite.com



ABOUT US

- Trusted provider of high-performance accessories engineered for the most demanding industrial environments.
 - Supporting clients across industries like oil & gas, mining, manufacturing, and marine sectors. Committed to excellence, reliability, and adherence to the highest safety standards.
-

WHY CHOOSE HAZBRITE

⇒ SAFETY YOU CAN COUNT ON :

- Thoroughly tested by experts to meet stringent safety requirements.
- Compliant with industry-leading certifications and protocols.
- Built to deliver long-lasting performance in demanding condition.

⇒ FAST AND RELIABLE DELIVERY OF PRODUCTS :

- Majority of orders fulfilled on time delivery.
- Immediate availability of products for urgent needs.
- Real-time tracking for complete visibility and control.

⇒ EXPERTISE DRIVEN SERVICES :

- Dedicated support team with deep industry knowledge.
- Customized lighting solutions tailored to your project's need.
- Comprehensive after-sales support and maintenance.

⇒ ECO - CONSCIOUS SOLUTIONS ;

- High-efficiency lighting that cuts energy usage.
 - Environmentally responsible design and packaging.
 - Sustainable products that reduce waste and operational costs.
-

**SETTING THE STANDARD IN SAFETY-ORIENTED
ACCESSORIES FOR CRITICAL, HAZARDOUS & SAFE
OPERATIONS ALIKE.**


DESCRIPTION

HBSR long palm double stud tubular terminal ends, which also known as "Non-Rotating Terminals" are manufactured with ETP grade copper with purity 99.96% having conductivity Min. 97.6% IACS.

STANDARD MATERIALS

- The terminal is annealed to prevent cracking during crimping, and a chamfered mouth facilitates easy cable insertion.
- Item identification on cable lug.
- The terminal is coated with tin to prevent oxidation and ensure optimal corrosion resistance.
- Two holes ensure non rotation in equipments such as transformer & Moving equipments where vibration is critical.
- The hole size punch according as per requirement.
- Material – E-copper as per EN 13600.
- Dimension as per 12-SDMS-02 REV:06.

DIMENSIONS

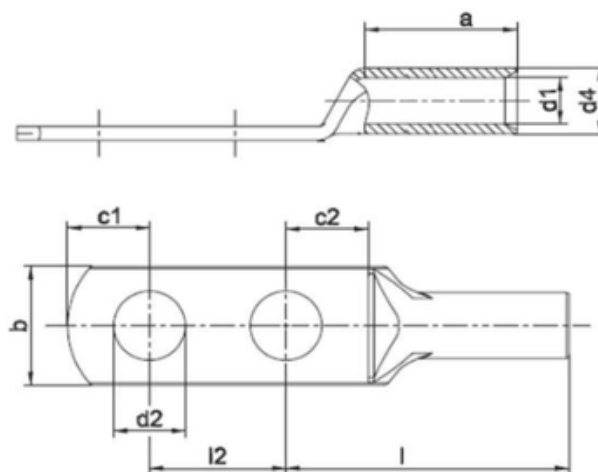

Note : Product Specifications and Design subject to change without notice



APPLICATIONS




Power Distribution



Renewable Energy



Automotive & Marine

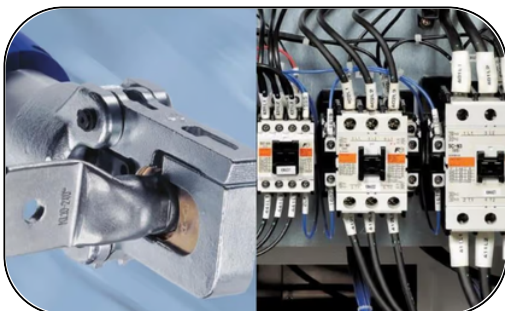

Industrial & Manufacturing



Railway & Transportation:

TECHNICAL DATA

Nominal Cross Section mm ²	PRODUCT NO.	Size Of Bolt die	d1	d4	b	a	c1	c2	l2	l
185	HBSR-185-12	12	19	25.5	37	40	16	16	44.5	82
240	HBSR-240-12	12	21.5	29	42	40	16	16	44.5	92
300	HBSR-300-12	12	24.5	32	48	50	16	16	44.5	100

CONTACT THE HAZBRITE TEAM FOR MORE ENQUIRIES.

HAZBRITE

www.hazbrite.com
sales@hazbrite.com
+85238533890

Unit 2A, 17/F, Glenealy Tower,
No. 1 Glenealy, Central.
Hong Kong.



Disclaimer

The information provided is accurate to the best of Hazbrite's knowledge at the time of publication. However, customers and end-users should consult the latest product specifications, installation guides, terms, and warranties available at www.hazbrite.com, which shall take precedence in case of any discrepancies or conflicts.